

Intelligent Mains Switching Input/Output Unit



Product overview

| | |
|------------------------------|--|
| Product | Mains Switching Input/Output Unit |
| Part No. | SA4700-103APO |
| Digital Communication | XP95®, Discovery® and CoreProtocol® compatible |

Compliance



Product information

The Intelligent Mains Switching Input/Output Unit provides a single line tolerant circuit (CoreProtocol only) containing one or more normally open contacts connected to a single pair of cables. It also provides a voltage free change over relay output capable of switching mains.

Refer to Table 1 for digital communications protocol compatibility and Table 2 for the Intelligent Mains Switching Input/Output Unit operating modes.

- Improved design for ease of wiring meaning faster installation
- Contains controllable isolator *
- Address range 1 - 254 *
- Nine pre-configured modes, including compatibility mode from XP95/Discovery to CoreProtocol systems *
- Two input channels
- Failsafe mode (meets BS 7273-4 requirements)
- Configurable input styles *
- Earth fault monitoring *

* Note: CoreProtocol enabled systems feature only, please check with your system partner for availability.

Technical data

All data is supplied subject to change without notice. Specifications are typical at 24V, 25°C and 50% RH unless otherwise stated.

| | |
|--|---|
| Supply voltage ($V_{min}-V_{max}$) | 17–35 V dc |
| Protocol | 5–13 V peak to peak |
| Power-up surge current | 1.1 mA |
| Quiescent current | 700 μ A |
| Max current LEDs On | 5.2 mA |
| Max current LEDs disabled | 700 μ A |
| Relay output contact rating | 5 A at 30 V dc or 250 V ac |
| Isolator data | Refer to the Short-Circuit Isolation datasheet PP2090 |
| Operating temperature | –40°C to +70°C |
| Humidity (no condensation or icing) | 0% to 95% RH |
| Vibration, impact and shock | EN 54-17 and EN 54-18 |
| IP rating | IP54 |
| Standards and approvals | EN 54-17, EN 54-18, CPR, LPCB, VdS, BOSEC, SBSC, FG |
| Dimensions | 60 mm height x 150 mm width x 90 mm depth |
| Weight | 301g |

Table 1: Digital communications protocol compatibility

| Protocol | Device Behaviour |
|---|------------------|
| XP95 [†] /Discovery [†] | XP95 |
| CoreProtocol [†] | Soteria |

[†] Fire control panel dependant

Table 2: Intelligent Mains Switching Input/Output Unit operating modes*

| Mode | Description |
|------|--|
| 1 | DIL Switch XP Mode |
| 2 | Alarm delays |
| 3 | Output and N/O input (can be equivalent for Output only) |
| 4 | Output and N/C input |
| 5 | Output with Feedback (N/C) |
| 6 | FailSafe Output with Feedback (N/C) |
| 7 | FailSafe Output without Feedback |
| 8 | Momentary Input Activation Sets Output Relay |
| 9 | Input Activation Sets Output |

* CoreProtocol enabled systems only

Failsafe Mode

In Failsafe mode the Intelligent Mains Switching Input/Output Unit will activate the on-board relay without being commanded by the control panel on loss of loop or protocol loss. Failsafe mode is selected via a DIL switch and indicated with an analogue value of 17.

Mechanical Construction

The Intelligent Mains Switching Input/Output Unit (see Figure 1) is available in the new faceplate style enclosure. This can be mounted with the supplied back-box for surface mounting or flush mounted using a UK double gang, flush mounting back-box of minimum depth 30mm.

EMC Directive 2014/30/EU

The Intelligent Mains Switching Input/Output Unit complies with the essential requirements of the EMC Directive 2014/30/EU, provided that it is used as described in this datasheet.

A copy of the Declaration of Conformity is available from Apollo on request.

Conformity of the Intelligent Mains Switching Input/Output Unit with the EMC Directive, does not confer compliance with the directive on any apparatus or systems connected to them.

Construction Products Regulation 305/2011/EU

The Intelligent Mains Switching Input/Output Unit complies with the essential requirements of the Construction Products Regulation 305/2011/EU.

A copy of the Declaration of Performance is available from Apollo on request.

Connectivity

Refer to Figures 2, and 3 for unit connection information. Refer to Installation Guide 39215-161 for the installation instructions on this product. Table 3 details the status indications of this unit, from normal operation through to fault conditions.

Figure 1: Intelligent Mains Switching Input/Output Unit dimensional drawing

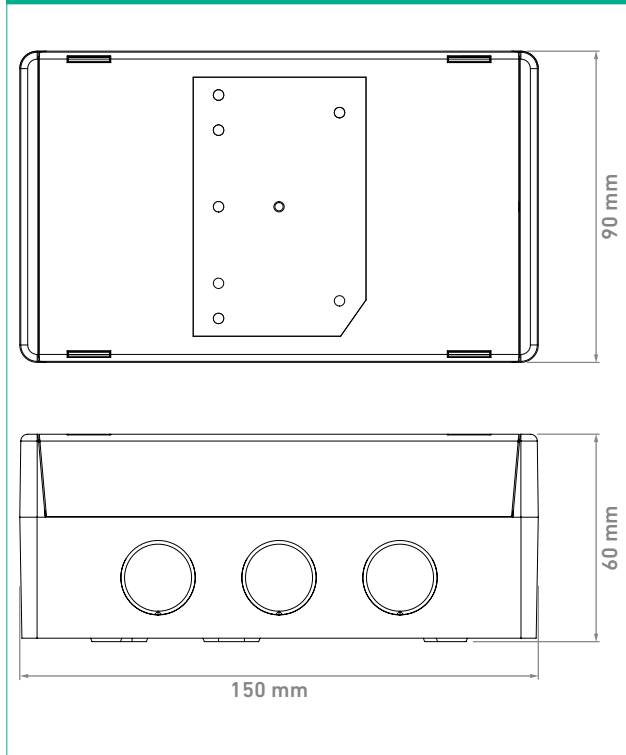


Table 3: Status Indications

| Legend | LED Status | Description |
|-------------|-------------------|--------------|
| RLY | Continuous Red | Relay Active |
| RLY | Continuous Yellow | Relay Fault |
| Poll/ISOL | Flashing Green | Polling LED |
| Poll/ISOL | Continuous Yellow | Isolator LED |
| I/P 1, IP 2 | Continuous Yellow | Input Fault |
| I/P 1, IP 2 | Continuous Red | Input Active |

Figure 2: Intelligent Mains Switching Input/Output Unit standard resistive monitoring mode connectivity diagram


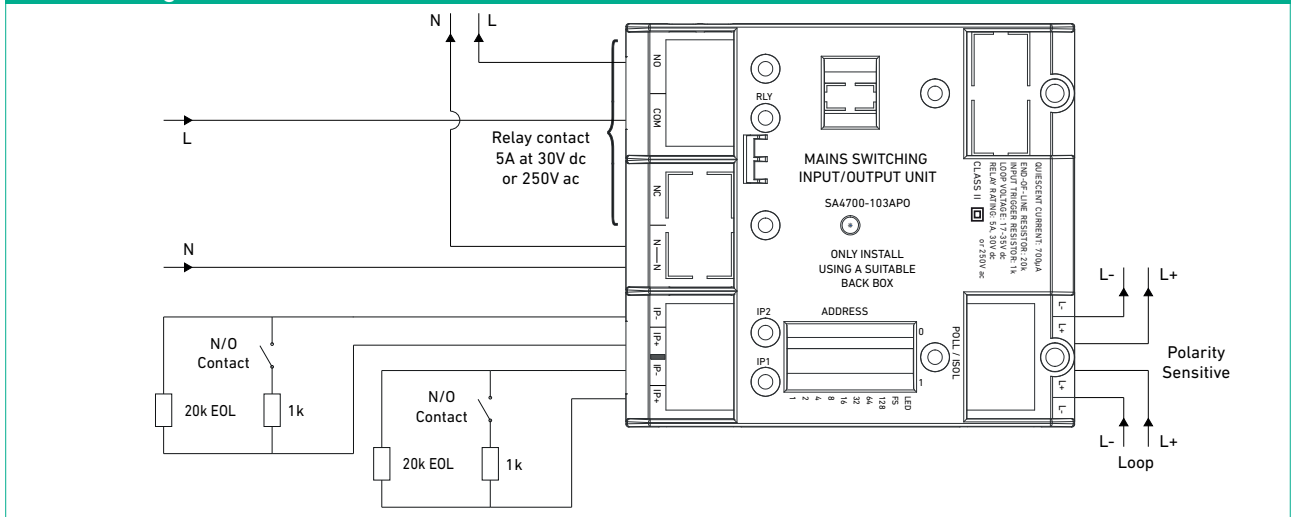


Figure 3: Intelligent Mains Switching Input/Output Unit single fault tolerant zone monitoring mode connectivity diagram (compatible with CoreProtocol only)

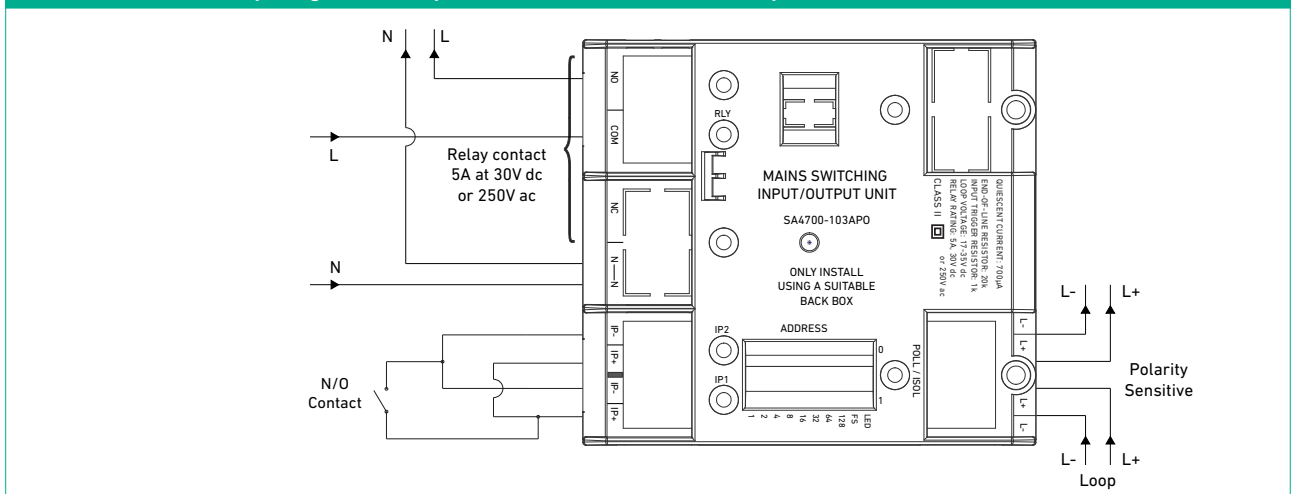

This page has intentionally been left blank