



Shock Detectors

Outstanding perimeter detection in a sleek and easy to install housing. Our proprietary digital signal processing ensures the ultimate balance between detection performance and false alarm immunity. Combined magnetic contact option. Grade 2 and Grade 3 versions available.

Covert Magnetic Contacts

An ultra-compact wireless contact and magnet small enough to be installed in almost any location, including in uPVC window frames. Frequency hopping technology, simple enrolment and a true battery reading makes this the most compact, reliable and easy to install contact available.

Covert Accelerometer

Designed to protect your most valuable possessions, the W-ACC-C is discreet enough to be concealed in or on almost any item and signals an alarm when the object is moved.


Ideal applications include valuable paintings, jewellery boxes, fine art, drawers, cupboard doors, safes etc.

Shock Detectors & Magnetic Contacts



Connectivity	WIRED	WIRED	WIRED	WIRELESS	WIRELESS
Product Name	SD-G2	SD-G3	SD-MC-G2	W-SD	W-SD-MC
Description	Grade 2 Shock Detector	Grade 3 Shock Detector	Grade 2 Shock Detector & Magnetic Contact	Wireless Shock Detector	Wireless Shock Detector & Magnetic Contact
2 Additional Wired Inputs	-	-	-	✓	✓
Colours Available	White / Brown / Anthracite	White / Brown / Anthracite	White / Brown / Anthracite	White / Brown / Anthracite	White / Brown / Anthracite
Vibration Detection Technology	✓	✓	✓	✓	✓
Magnetic Detection Technology	-	-	✓	-	✓
Digital Signal Processing	✓	✓	✓	✓	✓
Solid State Piezo Sensor	✓	✓	✓	✓	✓
Adjustable Sensitivity	✓	✓	✓	✓	✓
Dual Range Selection	✓	✓	✓	✓	✓
Lid Tamper	✓	✓	✓	✓	✓
Back Tamper	-	✓	-	✓	✓
Tri-colour LED	✓	✓	✓	✓	✓
Local LED Control	✓	✓	✓	✓ Panel	✓ Panel
Remote LED Control	✓	✓	✓	-	-
Selectable Latching / Non-Latching	✓	✓	✓	-	-
Frequencies	-	-	-	868.65MHz & 869.15MHz	868.65MHz & 869.15MHz
2 Way Wireless Communications	-	-	-	✓	✓
Always Awake	-	-	-	✓	✓
True Battery Reading	-	-	-	✓	✓
Digital Thermometer	-	-	-	✓	✓
Simple Enrolment	-	-	-	✓	✓
Frequency Hopping Technology	-	-	-	✓	✓
Shock Dimensions (hwd)	87 x 25 x 25mm	87 x 25 x 25mm	87 x 25 x 25mm	123 x 25 x 29mm	123 x 25 x 29mm
Magnetic Dimensions (hwd)	-	-	51 x 12 x 11mm	-	51 x 12 x 11mm
EN 50131-2-8:2016	Grade 2	Grade 3	Grade 2	Grade 2	Grade 2
EN 50131-2-6:2018	-	-	Grade 2	-	Grade 2

Covert Detectors & Accelerometer

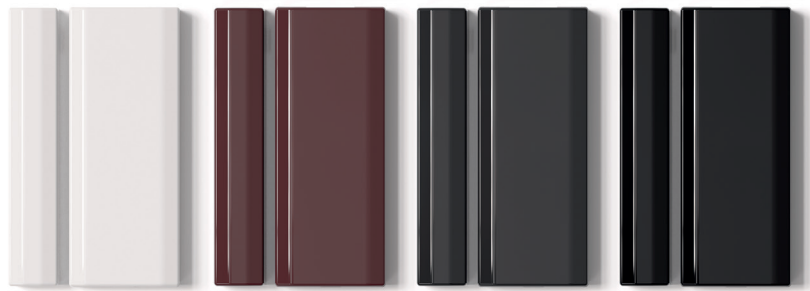

Connectivity	WIRELESS	WIRELESS	WIRELESS	WIRELESS
Product Name	W-SD-C	W-SD-MC-C	W-MC-C	W-ACC-C
Description	Wireless Covert Shock Detector	Wireless Covert Shock Detector & Magnetic Contact	Wireless Covert Magnetic Contact	Wireless Accelerometer
Colours Available	White / Brown / Anthracite / Black	White / Brown / Anthracite / Black	White / Brown / Anthracite / Black	White / Brown / Anthracite
Vibration Detection Technology	✓	✓	-	-
Magnetic Detection Technology	-	✓	✓	-
Digital Signal Processing	✓	✓	-	✓
Solid State Piezo Sensor	✓	✓	-	-
Adjustable Sensitivity	✓	✓	-	-
Lid Tamper	✓	✓	✓	✓
Back Tamper	✓	✓	✓	✓
Tri-colour LED	✓	✓	✓	✓
Frequencies	868.65MHz & 869.15MHz	868.65MHz & 869.15MHz	868.65MHz & 869.15MHz	868.65MHz & 869.15MHz
2 Way Wireless Communications	✓	✓	✓	✓
Always Awake	✓	✓	✓	Programmable
True Battery Reading	✓	✓	✓	✓
Digital Thermometer	✓	✓	✓	✓
Simple Enrolment	✓	✓	✓	✓
Frequency Hopping Technology	✓	✓	✓	✓
Dimensions (hwd)	Standard Back: 63 x 25 x 7mm Deeper Back: 63 x 25 x 13mm	Standard Back: 63 x 25 x 7mm Deeper Back: 63 x 25 x 13mm	Standard Back: 63 x 25 x 7mm Deeper Back: 63 x 25 x 13mm	Standard Back: 63 x 25 x 7mm Deeper Back: 63 x 25 x 13mm
Magnetic Dimensions (hwd)	-	Standard Back: 63 x 11 x 7mm Deeper Back: 63 x 11 x 13mm	Standard Back: 63 x 11 x 7mm Deeper Back: 63 x 11 x 13mm	-
EN 50131-2-8:2016	Grade 2	Grade 2	-	-
EN 50131-2-6:2018	-	Grade 2	Grade 2	-
IP65 Housing Option	-	-	✓	✓